

VALUE FLOOD LIGHT



PRODUCT FEATURES

- Die-cast aluminum, Tempered Glass
- Powder Coated
- 100 lm/W

SPD 4kV	PF≥0.9	120°	36,000 hrs @L70	CRI ≥80, ≥70
IP66	IK08			

APPLICATION AREAS


- For recreational sports / Stadium
- Exhibition Center / Parking Lots
- Shopping Mall / Accent Lighting
- Building Facades

CCT

● 3000K
 ● 4000K
 ● 5700K
 ● 6500K

PRODUCT BENEFITS

- Light uniformity and sight advantage
- Up to 80% savings in energy cost
- Bright, robust, and durable
- Low maintenance cost

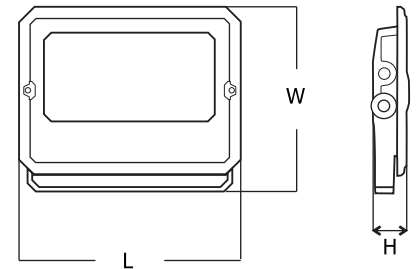

Wattages	Total Lumens	Voltage Range	LxWxH (mm)
30W	3,000	85~265V	247x187x42
50W	5,000	100~265V	247x187x42
100W	10,000	100~265V	297x215x52
150W	15,000	100~265V	373x283x56
200W	20,000	100~265V	435x313x60